

 SERIES

Hytera 



Intrinsically Safe DMR Radio

# PD5 SERIES UL913

- UL Certified DMR radio
- Analog & Digital Dual Modes
- Compact design




PD502i

PD562i

[www.hytera.us](http://www.hytera.us)





Today, safety is the most important thing we pursue in every aspect of life and work. Hytera understands the challenges in hazardous environments and is dedicated to designing and developing safer radios for more and more customers. Hytera believes it is rather urgent to provide an intrinsic safe radio to commercial market. Build a radio with the classic housing to provide a small and light product. Design a radio to pass UL913 certification for most dangerous areas with explosive gas and combustible dusts. Introduce a cost-effective radio with much more features for enterprises and commercial users.

# UL913 Certificate

Class I III Division 1, Group C-G, -30°C to 55°C, T4  
Class I- Division 2, Group A-D

Atmosphere:  
Class I-Gas, vapors;  
Class II-Dust;  
Class III-Fibers, Flyings

Operating Temperature

Temperature Class  
(Maximum device surface  
temperature)

T1-450°C	T3C-160°C
T2-300°C	T4-135°C
T3-200°C	T5-100°C
T3A-180°C	T6-85°C
T3B-165°C	

## Class I III Division 1 Group C-G -30°C to 55°C T4

Area Classification: (Flammable  
material present time) NEC 500  
Division 1: Gas/Dust normally  
present in explosive amounts  
Division 2: Gas/Dust not  
normally present in explosive  
amounts

Gas Types by Group:  
A-Acetylene  
B-Hydrogen  
C-Ethylene and related products  
D-Propane and alcohol products

Dust Types by Group:  
E-Metal dust  
F-Coal dust  
G-Grain and non-metallic dust

ANTENNA

LIMITLESS CHANNEL  
SELECTOR

PUSH-TO-TALK BUTTON

SPEAKER  
AND MICROPHONE

PROGRAMMABLE  
BUTTON

POWER ON/OFF,  
VOLUME UP/DOWN

AUDIO JACK

DISPLAY

LIMITED KEYPAD



# Features

## Small, Sleek, Light

The size is 115 X 54 X 35mm (PD502i UL913)/115 X 54 X 37mm (PD562i UL913), dual-color injection, weight is 298g PD502i UL913)/ 311g(PD562i UL913).

---

## Long Battery Life

In digital mode, PD5i UL913 Series operate upto 20 hours under a duty cycle of 5-5-90.

---

## Rugged & Reliable

It is compliant with MIL-STD-810 G standards & IP54.

---

## One Touch Call/Text

Support One Touch features that comprise Preprogrammed Text Messages, Voice Calls and Supplementary Features.

---

## Supplementary Features (optional)

PD5i UL913 Series support radio enable, radio disable, and remote monitor, as well as priority interrupt.

---

## Dual Mode (Analog & Digital)

Dual modes (analog & digital) operation ensures a smooth analog to digital migration.

---

## Radio Registration Service

RRS allows PD5i Series to work in Smart Dispatch and SmartOne Dispatch system, so that the dispatcher can check if the radio is on line or off line.

---

## A&D Mixed Scan

PD5i supports to have analog channel and digital channels added in one scan list. This is more convenient for customers to have a smooth migration from analog radios to digital radios.

---

## Secure Communication

Provide basic digital encryption and Scrambler feature in analog mode.

---

## Advanced Signaling

Support multiple advanced analog signaling modes, including HDC1200, 2-Tone and 5-Tone, providing better integration into existing analog radio fleets.

## Emergency Alarm

Emergency Alarm can be sent to other radios via one touch of programmable button, then establish an emergency call in a specific group. Make your response for big event more quickly.

---


## Single-site XPT Trunking (optional)

PD5i UL913 supports working in Hytera XPT Trunking system, which is a cost-effective trunking system and provides dynamic assignment of voice and data service for a large number of subscribers.

---

## Pseudo Trunk

This virtual trunking feature allocates a free timeslot for urgent communications. This effectively enhances frequency efficiency and allows you to communicate in a timely manner in emergency situations.

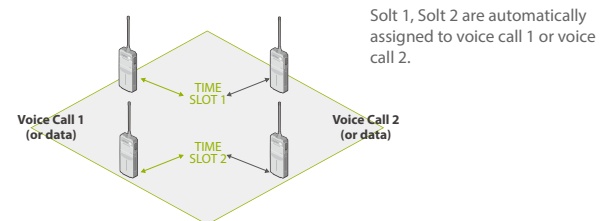

# Highlights

- UL Certified DMR radio
- Ergonomic User-Friendly Design
- Light & Durable
- Compact Size & Clear Voice
- Cost-effective



## Target Markets



### Manufacturing

Some flammable metal, mineral, or other dusts, existing in the factory's air, may give rise to explosion.



### Chemical Industry

Flammable substances are converted and processed. These processes may give rise to explosive mixtures.



### Food and feedstuffs industry

Explosive dusts may arise during transport and storage of grain, sugar, etc.



### Refinery

The hydrocarbons handled in refineries are all flammable and may give rise to explosive atmospheres depending on their flash point.



### Pharmaceutical industry

Alcohols are often used as solvents in the production of pharmaceuticals. Agents and auxiliary materials may give rise to dust explosions.



### Firefighting

Fire environment often comes with strong smoke, flammable matter and high temperature.

## Accessories

Versatile UL certified  
Accessories for Specific Tasks



Adapter PS1026(for non-hazardous area only)  
Strap Ro03  
PC63 Data Cable (USB Port)  
NCN011 Nylon Carrying Case (half-folded) (non-swivel) (black)

Pictures above are for reference only and may vary from actual products.

# Specifications

General	
Frequency Range	UHF: 350-400MHz , 400-470MHz ; VHF: 136-174MHz
Channel Capacity	256(PD502i)/512 (PD562i)
Zone Capacity	16 (PD502i)/32 (PD562i)
Channel Spacing	25/20/12.5KHz
Operating Voltage	7.4V
Battery	2000mAh (Li-Ion)
Battery Life (5/5/90 )	Analog/Digital: about 15.3 Hours/20 Hours
Weight	298g(PD502i UL913)/311g(PD562i UL913)
Dimensions	115 X 54 X 35mm (PD502i UL913) 115 X 54 X 37mm
Frequency Stability	±0.5ppm(PD562i UL913)
Antenna Impedance	50Ω
Receiver	
Sensitivity (Digital)	0.22μV / BER 5%
Sensitivity (Analog)	0.22μV (Typical) (12dB SIN AD) 0.4μV (20dB SIN AD) 0.22μV (12dB SIN AD)
Adjacent Selectivity	TIA-603 60dB @ 12.5KHz/70dB @ 20 & 25KHz
	ETSI 60dB @ 12.5KHz/70dB @ 20 & 25KHz
Spurious Response Rejection	TIA-603 70dB @ 12.5/20/25KHz
	ETSI 70dB @ 12.5/20/25KHz
Inter-modulation	TIA-603 70dB @ 12.5/20/25KHz
	ETSI 65dB @ 12.5/20/25KHz
Hum & Noise	40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz
Rated Audio Power Output	0.5W
Rated Audio Distortion	≤3%
Audio Response	+1 ~ -3dB
Conducted Spurious Emission	<-57dBm

Transmitter	
RF Power Output	VHF High power: 5W VHF Low power: 1W UHF High power: 4W UHF Low power: 1W
FM Modulation	11K0F3E @ 12.5KHz 14K0F3E @ 20KHz 16K0F3E @ 25KHz
4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm <1GHz, -30dBm >1GHz
Modulation Limiting	±2.5KHz @ 12.5KHz ±4.0KHz @ 20KHz ±5.0KHz @ 25KHz
FM Hum & Noise	40dB @ 12.5KHz 43dB @ 20KHz 45dB @ 25KHz
Adjacent Channel Power	60dB @ 12.5KHz, 70dB @ 20/25KHz
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE+2™
Digital Protocol	ETSI-TS102 361-1,-2,-3
Environmental	
Operating Temperature	-30°C ~ +60°C
Storage Temperature	-40°C ~ +85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
Dustproof & Waterproof	IP54 Standard
Humidity	Per MIL-STD-810 G Standard
Shock & Vibration	Per MIL-STD-810 G Standard

All specifications are subject to change without notice due to continuous development.



## Hytera America

3315 Commerce Parkway, Miramar, FL 33025, United States  
Telephone: +1(954)846-1011

8 Whatney, Suite 200, Irvine, CA 92618, United States  
Telephone: +1(949)326-57 0

1916 Wright Boulevard, Schaumburg, IL 60193, United States  
Telephone: +1 (213) 262-3578



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

**HYT**, **Hytera** are registered trademarks of Hytera Communications Co.,Ltd.  
© 2018 Hytera Communications Co.,Ltd. All Rights Reserved.